



# NYLONFLEX

## Flexible

### APPLICATIONS

- Can be used wet or dry with any type of degreaser.
- Very efficient for the narrowest and most difficult to reach areas.
- Recommended for edges scuffing before painting.




### 2 colors / 2 use :

- **red:** very fine grit (aluminium oxide). For surface preparation, for new parts.
- **grey:** ultra fine grit (silicon carbide). To prepare before touching up the paintwork.

### AVAILABLE SHAPES



Rolls

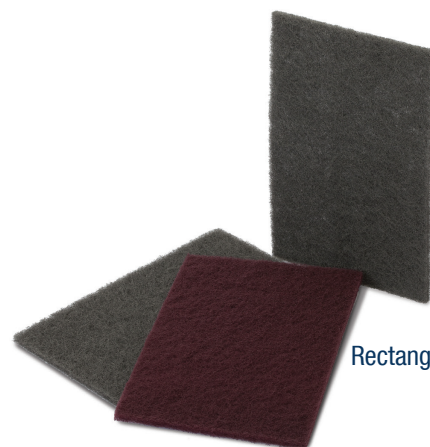

Rectangles

### TECHNICAL DATA

#### Red Nylonflex:

- Composition: nylon fiber, resin, aluminium oxide grain and alumino-silicate
- Grain size: very fine A
- Weight: 630 g/m<sup>2</sup>
- Thickness: 9 mm

#### Grey Nylonflex:

- Composition: fibre nylon, résine, grain carbure de silicium
- Grain size: ultra fine S
- Weight : 390 g/m<sup>2</sup>
- Thickness: 9 mm